


GU256X32L-3900

SIMPLIFIED DATASHEET

Features

Larger VFD for longer message display. Same character size as GU384X32L-3900B, in a more compact display.

Physical dimension

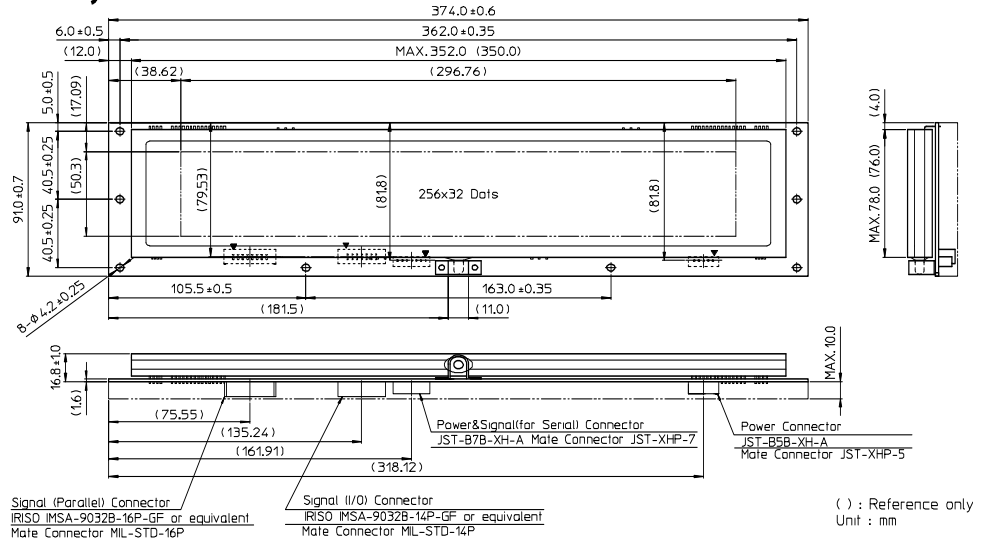

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC1	4.75	5.00	5.25	VDC	-
	VCC2	22.8	24.0	25.2	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Parallel I/F						
Logic input current	I _{pIH}	-	-	1.0	μADC	-
D0-D7, /WR	I _{pIL}	-	-	-200	μADC	-
Logic input voltage	V _{pIH}	0.8VCC1	-	VCC1	VDC	-
D0-D7, /WR	V _{pIL}	0	-	0.2VCC1	VDC	-
Logic output voltage	V _{pOH}	3.5	-	VCC1	VDC	I _{OH} =-10 μA
RDY	V _{pOL}	0	-	0.6	VDC	I _{OL} =4mA
RS-232 I/F						
Logic input voltage	V _{sIH}	3	-	15	VDC	-
RXD, DSR	V _{sIL}	-15	-	-3	VDC	-
Logic output voltage	V _{sOH}	5	-	-	VDC	RL=3KΩ
RXD, DSR	V _{sOL}	-	-	-5	VDC	-
Logic input Impedance	R _{sIN}	3	-	7	KΩ	-
RXD, DSR						-
General-purpose I/O port						
Power Supply Current 1	ICC1	-	60	90	mADC	-
Power Supply Current 2	ICC2-1	-	480	670	mADC	All dots ON
	ICC2-2	-	370	520	mADC	All dots OFF
Power Consumption		-	11.8	16.5	W	All dots ON

Optical Specifications

Parameter	
Luminance	350 cd/m ² Min. (700 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

Environmental Specifications

Parameter	
Operating Temperature	-40 ~ +70 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/S ² (40G) 9ms X-Y-Z, 3 times each direction

Physical Specifications

Parameter	
Number of Dots	8,192 (256 x 32)
Display Area	296.76 mm x 50.3mm
Dot Size (X x Y)	0.96 mm x 1.32 mm
Dot Pitch (X x Y)	1.21 mm x 1.58 mm
Weight	About 746 g

Interface

Parallel(CMOS), Asynchronous Serial (RS232), I/O port

Pin Assignment

Pin No.	Signal	Pin No.	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	GND	10	/WR
11	GND	12	RDY
13	GND	14	GND
15	VCC1	16	VCC1

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	RXD	19200bps
2	DTR	38400bps*
3	DSR	(*:Default setting)
4	TXD	
5	TEST	
6	VCC1	
7	GND	

(Powr connector)

Pin No.	Signal
1	VCC1
2	GND
3	VCC2
4	GND
5	TEST

(General-purpose I/O port:Abbreviation)

Selectable Font

Parameter	*ANK(Alphabet, Numeric, Kana)
ANK	All Font Size
International	6 x 8 / 8 x 16 / 12 x 24 / 16 x 32 dot
2-byte character	16 x 16 dot
Character numbers	42 x 4 by 6 x8 ASCII
	16 x 2 by 16 x 16 dot 2-byte character
	16 x 1 by 16 x 32 dot ASCII

Functions

Parameter	
Variable Character display	Variable Action Commands
Scroll function	Line / BOX Draw
Display Power Auto ON/OFF	AND/OR/XOR Mixture display
User Windows function	Program Macro function
I/O Port Control Function	Graphic DMA mode
Bit image	
Variable stored settings	
etc.	