Noritake itron

GU320X32D-3900

SIMPLIFIED DATASHEET

■ Features

Mid-sized display area VFD module. Long width suitable for message display in embedded system, or counter-top display unit, etc.

■ Physical dimension

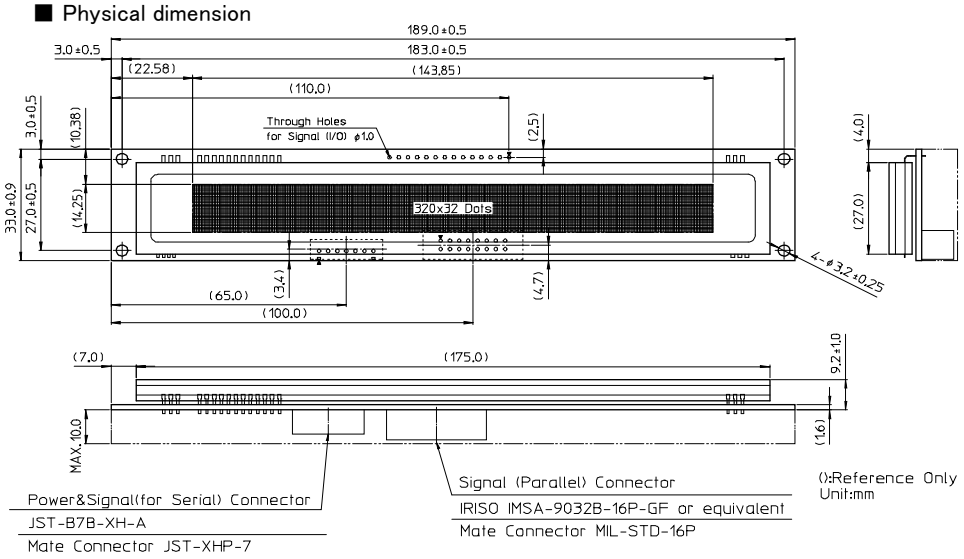

Specifications

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
電源電圧	VCC	4.75	5.00	5.25	VDC	–

■ Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Parallel IF						
Logic input current	IpIH	–	–	1.0	μADC	–
D0-D7,/WR	IpIL	–	–	-200	μADC	–
Logic input voltage	VpIH	0.8VCC	–	VCC	VDC	–
D0-D7,/WR	VpIL	0	–	0.2VCC	VDC	–
Logic output voltage	VpOH	3.5	–	VCC	VDC	IOH=-10μA
RDY	VpOL	0	–	0.6	VDC	IOL=4mA
RS-232 I/F						
Logic input voltage	VsIH	3	–	15	VDC	–
RXD, DSR	VsIL	-15	–	-3	VDC	–
Logic output voltage	VsOH	5	–	–	VDC	RL=3KΩ
RXD, DSR	VsOL	–	–	-5	VDC	
Logic input Impedance						
RXD, DSR	RsIN	3	–	7	KΩ	–
General-purpose I/O port						Abbreviation
Power Supply Current 1	ICC1	–	480	620	ADC	All dots ON
Power Supply Current 2	ICC2	–	380	490	ADC	All dots OFF
Power Supply Current 3	ICC3	–	80	120	mADC	Display power OFF
Power Consumption		–	2.4	3.1	W	All dots ON

■ Optical Specifications

Parameter	
Luminance	350 cd/m^2 Min. (700 cd/m^2 Typ.)
Color of illumination	Green (Blue-Green)

■ Environmental Specifications

Parameter	
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/S2 (40G) 9ms X-Y-Z, 3 times each direction

■ Physical Specifications

Parameter	
Number of Dots	10,240 (320 x 32)
Display Area	143.85 mm x 14.25mm
Dot Size (X x Y)	0.3 mm x 0.3 mm
Dot Pitch (X x Y)	0.45 mm x 0.45 mm
Weight	About 82 g

■ Interface

Parallel(CMOS), Asynchronous Serial (RS232), I/O port

■ Pin Assignment

Pin No.	Signal	Pin No.	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	GND	10	/WR
11	GND	12	RDY
13	GND	14	GND
15	VCC1	16	VCC

(Asynchronous Serial)

Pin No.	Signal
1	RXD
2	DTR
3	DSR
4	TXD
5	TEST
6	VCC
7	GND

Baud Rate Setting
19200bps
38400bps*
(*:Default setting)

(General-purpose I/O port:Abbreviation)

■Selectable Font

Parameter	*ANK(Alphabet, Numeric, Kana)
ANK	All Font Size
International	6 x 8 / 8 x 16 / 12 x 24 / 16 x 32 dot
2-byte character	16 x 16 dot
Character numbers	52 x 4 by 6 x8 ASCII
	20 x 2 by 16 x 16 dot 2-byte character
	20 x 1 by 16 x 32 dot ASCII

■ Functions

Parameter	
Variable Character display	Variable Action Commands
Scroll function	Line / BOX Draw
Display Power Auto ON/OFF	AND/OR/XOR Mixture display
User Windows function	Program Macro function
I/O Port Control Function	Graphic DMA mode
Bit image	
Variable stored settings	
etc.	

RoHS COMPLIANT

Leaflet contents, and specifitaions and external appearance of products, may change without notice.
Please confirm product details in the specification.
(C)Copyright NORITAKE ITRON CORP.