




HIGHNESSTM

One of a kind

21.5" SURGICAL DISPLAY

- ◆ Full HD LED
- ◆ Premium Endoscopy Monitor
- ◆ CE, ISO, RoHS Complaint
- ◆ PIP and POP Function

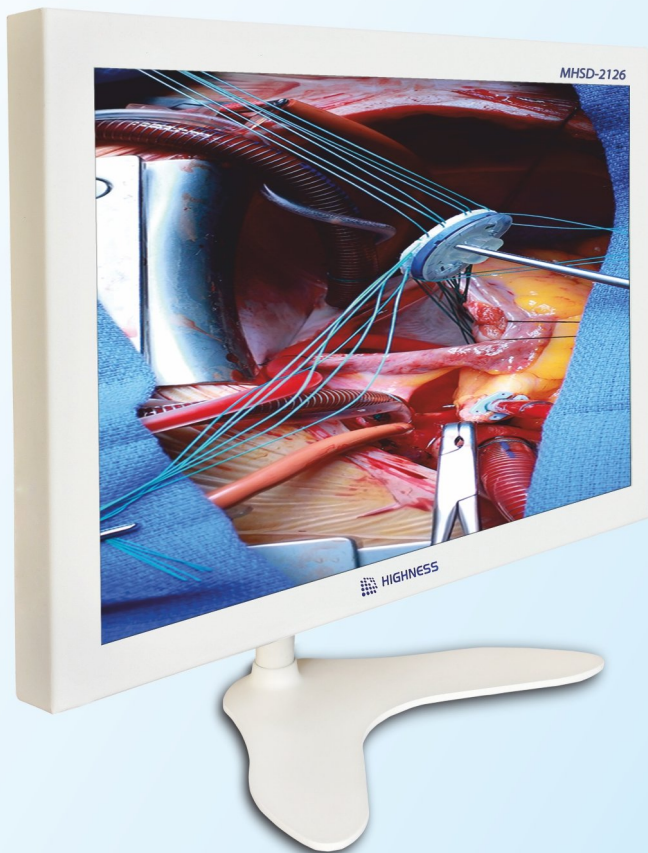

Applications:

- ENT Endoscopy
- Uro-Endoscopy
- Opthal Imaging
- GI Endoscopy
- Laparoscopy
- USG Imaging
- Surgical Microscopy

MHSD-2126





TECHNICAL SPECIFICATIONS

Model	MHSD-2126
Screen Technology	TFT AM LCD
Active Screen Size (Diagonal)	21.5"
Active Screen Size (H x V)	476.064 x 267.786 mm
Aspect Ratio	16:9
Resolution	1920 x 1080
Pixel Pitch	0.24765 mm
Viewing Angle (H, V)	178°, 178°
Maximum Luminance	500 cd/m ²
Contrast Ratio	1000:1
Color	16.7 Million
Response Time (Tr + Tf)	20 ms
Video Inputs Signals	Digital :- DVI Analog :- VGA, Composite Video & S-Video
Interface Port	Digital :- DVI Analog :- 15 Pin D-Sub, RCA & Mini Din
Other Mode	PIP and POP
Power Requirements	AC 240V
Power Consumption	55W Max
Power Saving	EPA, VESA Standard
Operating Temperature	0 to +50°C
Storage Temperature	-20 to +60°C
Relative Humidity	10% to 90% (Non Condensing)
Housing Color	White
Housing Material	Metal
Mounting Standard	VESA (100 mm)
Warranty	2 Years
Applications	ENT Endoscopy, Uro-Endoscopy, Opthal Imaging GI Endoscopy, Laparoscopy, USG Imaging, Surgical Microscopy



HIGHNESS MICROELECTRONICS PVT. LTD.

101-103, Elecon Chambers, Sakinaka MTNL Road,
 Andheri (E), Mumbai - 400 072. India.
 +91 22 2850 7123 | +91 22 4026 4263
www.highnessmicro.com
sales@highnessmicro.com



VOL M-L 1.0, June 2019

An ISO 9001:2015 Company. Copyright @ 2019 Highness Microelectronics Pvt. Ltd. All Rights Reserved.

All images are for representation purpose only. All images and content are copyrighted & copy, reprint or reproduction without written permission prohibited.